


LED COOLER LIGHT



Maximum overall	A	B	C	D
4FT	50.9in	46.9in	1.3in	1.2in
5FT	62.7in	58.7in	1.3in	1.2in
6FT	74.5in	70.6in	1.3in	29mm

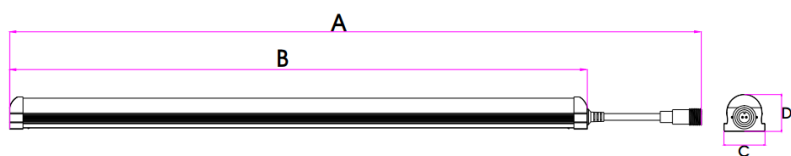

FEATURES

Input voltage: AC100-250V

Operating frequency: 50/60Hz

Power factor: ≥ 0.90

Ambient temperature range: $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$

Color Temp: 3000K~5000K

THD: $<20\%$

IP Rating: IP20

CRI: $>80\text{Ra}$



Beam angle: 170°

Cover: Clear

- Luminous Flux: $>120\text{lm/w}$
- Housing material: 6063-T5
- Suitable for Damp Location
- Suitable to use in UL approved enclosed fixtures
- 5 years' warranty

PARAMETER


Length (ft)	Product code	Certification	CRI	Wattage	Lumens 3000-5000K	Packing/carton	Weight/carton
4ft	ML-CL-4FT-18WT	ETL/cETLus, DLC42	>80	18W	2160 lm	1330×230×200mm 30pieces 1X40HQ Loading=33,000pcs	13kg
5ft	ML-CL-5FT-32WT	ETL/cETLus, DLC42	>80	32W	3840 lm	1630×230×200mm 30pieces 1X40HQ Loading=27,300pcs	15kg
6ft	ML-CL-6FT-40WT	ETL/cETLus, DLC42	>80	40W	4800 lm	1930×230×200mm 30pieces 1X40HQ Loading=23,400pcs	17kg

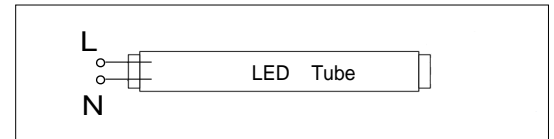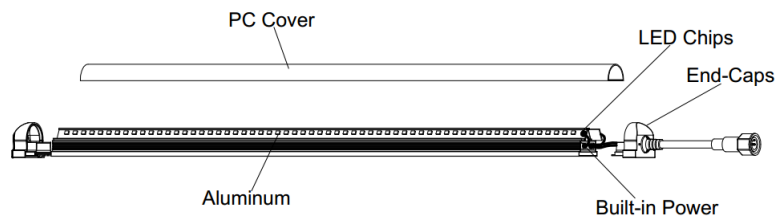

Electric Shock Attention

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

INSTALLATION INSTRUCTION



Disconnect the power before Installation

Step1. Install the mounting clip. Locate the mounting clip at the position where the tube is installed on and fixed by screws. Check the fixity of the mounting clip to make sure it cannot be loosed and shacked.

Step2. Fix the tube. Align the mounting clip on the back of the tube and jam the tube into the clip firmly.

Step3. Use male and female joint cables to connect multi tubes(A to B),max power should be less than 250W.

Step4. Turn on the power.

WARNING:

1. Risk of fire or electric shock, disconnect power before Installation
2. The electrical rating of these products are 100~277Vac, the installer must determine whether they have 100~277Vac at the luminaries before installation.
3. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
4. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

