

# LED INTIGRATED FIXTURE


## ML-Fix

- 4ft: **ML-Fix-4ft-22W**
- 8ft: **ML-Fix-8ft-60W**



### FEATURES

- ETL/DLC
- Suitable for Damp Location (IP20 rated!)
- 100-277Vac 50/60Hz (Input v)
- Efficacy: 120lm/w
- THD: <20%
- Beam angle: 120°
- Cover: Clear, Frosted, Striped
- Ambient temperature range:!  
-20°C ~+40°C!





Maximum Overall	A	B	C	D
4ft	47.56in	47.17in	1.22in	1.46in
8ft	94.8in	94.4in	1.22in	1.46in

Length (ft)	Product Code	WATTAGE	LUMEN	THD	BEAM ANGLE	CRI	CCT
4ft	ML-Fix-4ft-22W	22W	2640Lm	<20%	120°	>80	3000K~5000K
8ft	ML-Fix-8ft-60W	60W	7200Lm	<20%	120°	>80	3000K~5000K

4224 Northeast Expressway Atlanta, GA 30340

888.533.7860 • [www.metroled.com](http://www.metroled.com) • [info@metroled.com](mailto:info@metroled.com)

# MOUNTING GUIDE

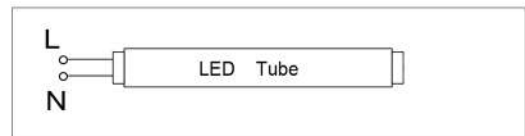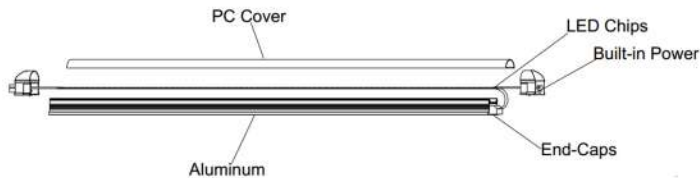


## Electric Shock Attention


Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

## INSTALLATION INSTRUCTION


### STEP1. PLACE CLIP KITS AND SCREWS CORRECTLY

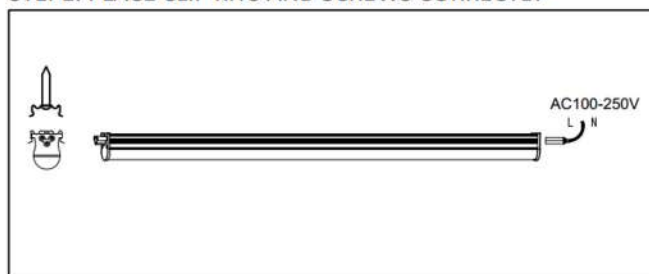


### STEP2. FIX THE LED TUBE TO THE CEILING OR WALL

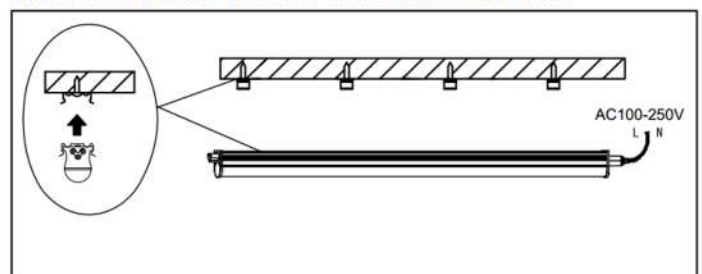

### STEP3. CONNECT THE POWER CORD TO THE TUBE

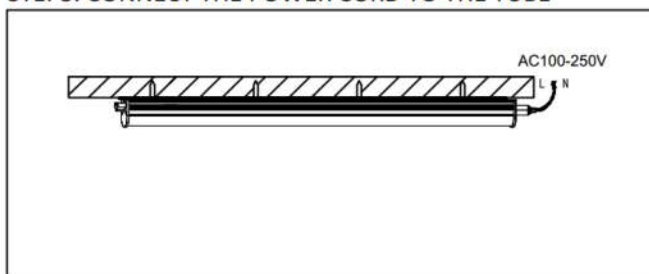

### STEP4. CONNECT BY LINKABLE CONNECTOR

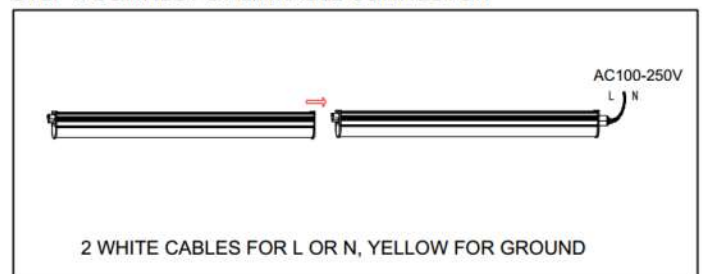

**CAUTION: THE INTEGRATED TUBES CAN NOT BE CONNECTED MORE THAN TOTAL PCS**



FOR MODEL ML-Fix-4ft-22W, THE MAX CONNECTING QUANTITY OF TUBE IS  $\leq 8$  PCS.

FOR MODEL ML-Fix-8ft-60W, WHEN USING RATED 125V/10A POWER SUPPLY WIRE, THE MAX CONNECTING QUANTITY OF TUBE IS  $\leq 5$  PCS. WHEN USING RATED 250V/2.5A POWER SUPPLY WIRE, THE MAX CONNECTING QUANTITY OF TUBE IS  $\leq 3$  PCS.

### WARNING:

1. DISCONNECT POWER BEFORE INSTALLATION, MUST OPERATED BY ELECTRICIAN
2. TAKE OUT THE TUBE. BEFORE INSTALLATION PLEASE CHECK IF THERE IS ANY UNSATISFACTORY CONDITION OF THE TUBE, SUCH AS WHETHER THE APPEARANCE IS DAMAGED OR DEFORMED, OR THE ACCESSORIES ARE COMPLETE OR NOT.
3. PLEASE USE IT UNDER CORRECT INPUT POWER RANGE
4. THIS TUBE IS NON-DIMMABLE
5. NOT FOR OUTDOOR OR SOME WHERE BE EXPOSED TO RAIN(WATERPROOF TYPE AVAILABLE)
6. IF THE LIGHTS DON'T WORK PROPERLY, PLEASE CHECK THE CONNECTIONS AFTER TURNING OFF THE POWER
7. USE UL APPROVED 3-PIN PLUG.

4224 Northeast Expressway  
Atlanta, Ga 30340  
888.533.7860  
info@metroled.com  
www.metroled.com

