

Catalog #:	
Project:	
Type:	Date:
Notes:	


LED INTEGRATED TUBE LIGHT



Features

- Input voltage: AC100-277V
- Operating frequency: 50/60Hz
- Power factor: ≥0.90
- Ambient temperature range: -20°C ~+40°C
- Color Temp: 5000K & 6500K
- THD: <20%
- IP Rating: IP20
- CRI: >80Ra
- Beam angle: 120°
- Lens: Clear, Frosted, Stripe
- Luminous Flux: >122lm/w
- Housing material: 6063-T5
- Suitable for Damp Location
- Suitable to use in UL approved enclosed fixtures
- 5 years warranty

Dimensions



Maximum overall	A	B	C	D
4FT	47.56"	47.17"	1.22"	1.46"
8FT	94.80"	94.41"	1.22"	1.46"

Length	Product Code	Certification	Wattage	CRI	Lumens	Lens Product Code	CCT Code
					4000-5000K		
4ft	ML-T8-22WN4F	DLC ETL/ cETLus	22W	>80	2640 lm	Frosted - F Clear - C	5000K - 5K 6500K - 65K
8ft	ML-FIX-8FT-60W	DLC ETL/ cETLus	60W	>80	7200 lm	Frosted - F Clear - C Strip - S	5000K - 5K 6500K - 65K

Accessories



Accessories Included



3FT Connector Cable - 1M-Cable-MF
6FT Connector Cable - 2M-Cable-MF




Electric Shock Attention


Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

Installation Instruction


STEP1. PLACE CLIP KITS AND SCREWS CORRECTLY

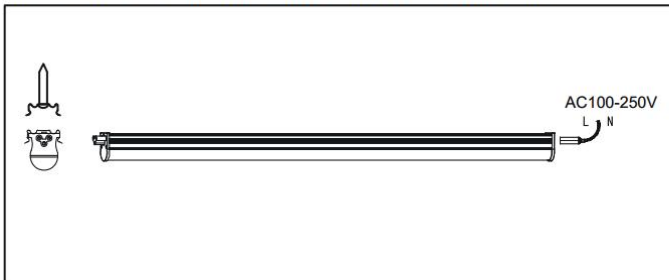


STEP2. FIX THE LED TUBE TO THE CEILING OR WALL

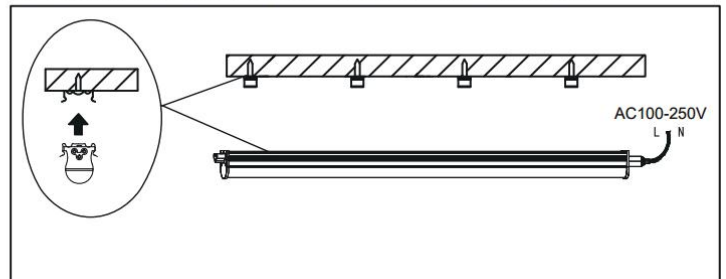

STEP3. CONNECT THE POWER CORD TO THE TUBE

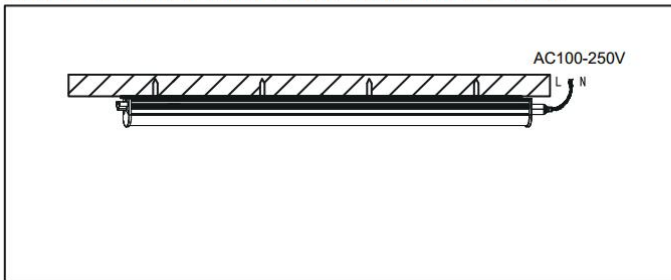

STEP4. CONNECT BY LINKABLE CONNECTOR

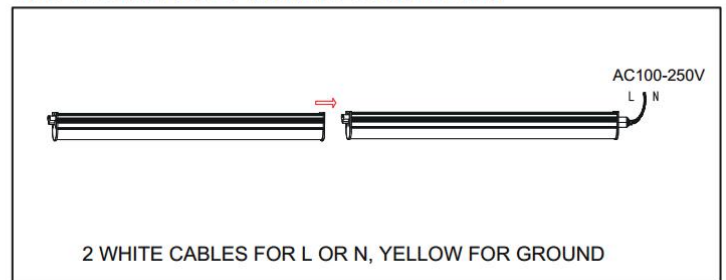

CAUTION: THE INTEGRATED TUBES CAN NOT BE CONNECTED MORE THAN TOTAL PCS



FOR MODEL ML-Fix-4ft-22W, THE MAX CONNECTING QUANTITY OF TUBE IS ≤ 8 PCS.

FOR MODEL ML-Fix-8ft-60W, WHEN USING RATED 125V/10A POWER SUPPLY WIRE, THE MAX CONNECTING QUANTITY OF TUBE IS ≤ 5 PCS. WHEN USING RATED 250V/2.5A POWER SUPPLY WIRE, THE MAX CONNECTING QUANTITY OF TUBE IS ≤ 3 PCS.

WARNING:

1. DISCONNECT POWER BEFORE INSTALLATION, MUST OPERATED BY ELECTRICIAN
2. TAKE OUT THE TUBE. BEFORE INSTALLATION PLEASE CHECK IF THERE IS ANY UNSATISFACTORY CONDITION OF THE TUBE, SUCH AS WHETHER THE APPEARANCE IS DAMAGED OR DEFORMED, OR THE ACCESSORIES ARE COMPLETE OR NOT.
3. PLEASE USE IT UNDER CORRECT INPUT POWER RANGE
4. THIS TUBE IS NON-DIMMABLE
5. NOT FOR LOCATIONS THAT ARE DIRECTLY EXPOSED TO RAIN
6. IF THE LIGHTS DON'T WORK PROPERLY, PLEASE CHECK THE CONNECTIONS AFTER TURNING OFF THE POWER AND ENSURE THE CABLES ARE COMPLETELY PUSHED TOGETHER
7. USE UL APPROVED 3-PIN PLUG.