

LED WALL PACK

ML-SWP01-40AA1-abc



Note:

Where "a" can be "S" or blank to represent Surge-Protective Device or None Surge-Protective Device,
Where "b" can be "P" or blank to represent Photocontroller or None Photocontroller,
Where "c" can be any two-digit number to represent CCT



FEATURES

- IP65 Internal driver
- UL Certified
- High CRI
- 100-277Vac 50/60Hz
- Operating Temperature: -20° TO 45°

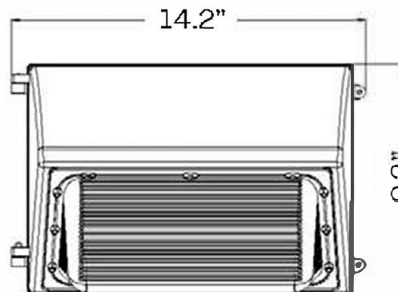

ADVANTAGES

- No UV or IR in the beam
- Easy to install and operate
- Energy Saving, long lifespan
- Instant Start. NO Humming
- Green and eco-friendly without mercury

APPLICATIONS

- Entrance Lighting
- Courtyard Lighting
- Outdoor Landscape Lighting
- Industrial lighting
- Buildings/Hotels/AreaWall Lighting

4224 Northeast Expressway Atlanta, GA 30340

888.533.7860 • www.metroled.com • info@metroled.com

TECHNICAL DATA SHEET

LED WALL PACK


ML-SWP01-40AA1-abc

INPUT POWER	INPUT VOLTAGE	LUMEN	VIEWING ANGLE	LUMEN EFFICANCY	PF	CRI	CCT
40W	100-277Vac (50/60Hz)	4400Lm	1100	115-125Lm/W	>0.9	>80	4000K, 4500K 5000K,5700K


Light Distribution Testing Parameters

DATA OF LAMP		Eff:116.64lm/W	
MODEL		Imax (cd)	1601
NOMINAL POWER (W)	40	AVAILABILITY (%)	94.2
RATED VOLTAGE (V)	120	Avai. FLUX(lm)	4298
NOMINAL FLUX(lm)	4564.65	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	4565
TEST VOLTAGE (V)	120	θ @50% (H, V)	115,108DEG

Luminosity Intensity Distribution Diagram

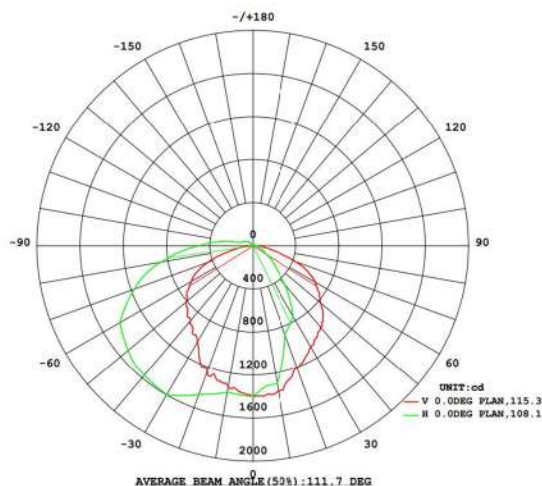

Flux out:2657 lm

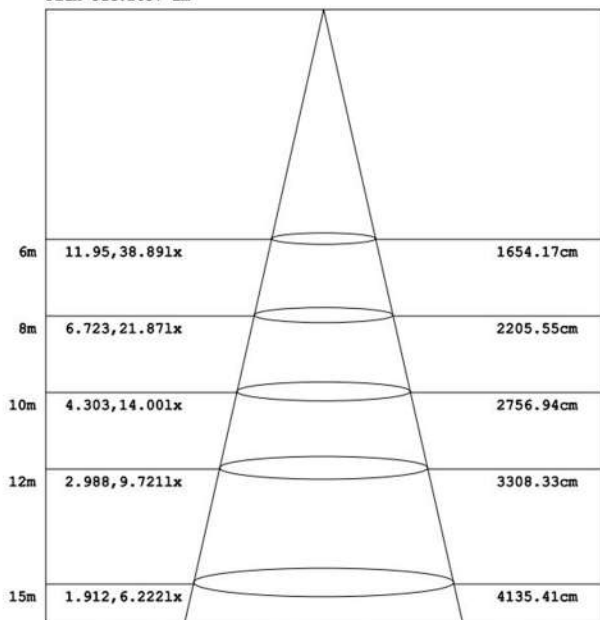

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



4224 Northeast Expressway
 Atlanta, Ga 30340
 888.533.7860
 info@metroled.com
 www.metroled.com

