

T8 4FT LED Tube Light



Back-lit LED panel light is with direct lighting design, which has higher lumen efficiency and perfect lighting performance. Moreover, since there is no light guide plate, it has advantages of less weight, cost and longer lifespan.

With flicker free driver, instant start, no radiation, no noise, no mercury and other material that is harmful to human body and environment

Features

- Warranty: 5-year limited warranty.
- Flicker free, eyesight protection.
- Efficiency: 125Lm/W
- Driver end-cap, easy replacing
- Input voltage: 100-277V
- Certified : ETL/DLC
- Instant on/off, no noise/UV/light leak/shadow

Application Areas


Office lighting, meeting room lighting, hall lighting, hotel lighting, super-market
 Commercial lighting: shopping mall, super market, retailer shops etc.
 Other situations: hospital, laboratory, dust-free workshop etc.

Product Image



Available size

Model	Dimension(mm)	Wattage	Option		Carton weight ((LBs)		Carton Size (in)	Qty/CTN
			PC cover	Color	N.W/CTN	G.W/CTN		
EDI-APT8-4f1600-AB4000	Ø26mm L1213±1mm	18W	Frosted	4000K	34	14.9	49.2X7.48X7.67	25
EDI-APT8-4f1600-AB5000	Ø26mm L1213±1mm	18W	Frosted	5000K	34	14.9	49.2X7.48X7.67	25

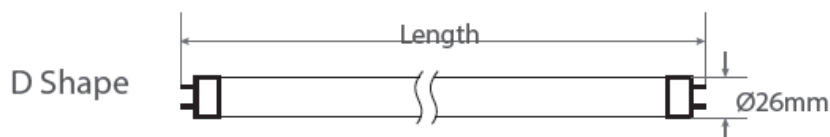



0-10V

Packing Method



Technical Data Sheet

Model No.	EDI-APT8-4f1600-AB4000	EDI-APT8-4f1600-AB5000
Watt(W)	18W	18W
Dimension(mm)	L1213±1mm	L1213±1mm
Input Voltage(V)	AC 100-277V	
LED Model	SMD 2835/ 0.2W/ /Ra 80	
CCT(K)	4000K	5000K
Efficiency (lm/W) ±5%	125lm/W	
Luminous Flux(lm) ±5%	2250LM	2250LM
Beam Angle (°)	120°	
Working Temp.(°C)	-15°C ~ +45°C	
DIM	0-10V	
Protection Class	Class II	
IP Rating	IP20	
Lifetime (hr)	>50000H	
THD	<15%	

Wiring diagram Type AB

