


# Led Linear High Bay Light



PHB05 110W / 165W

PHB03 220W

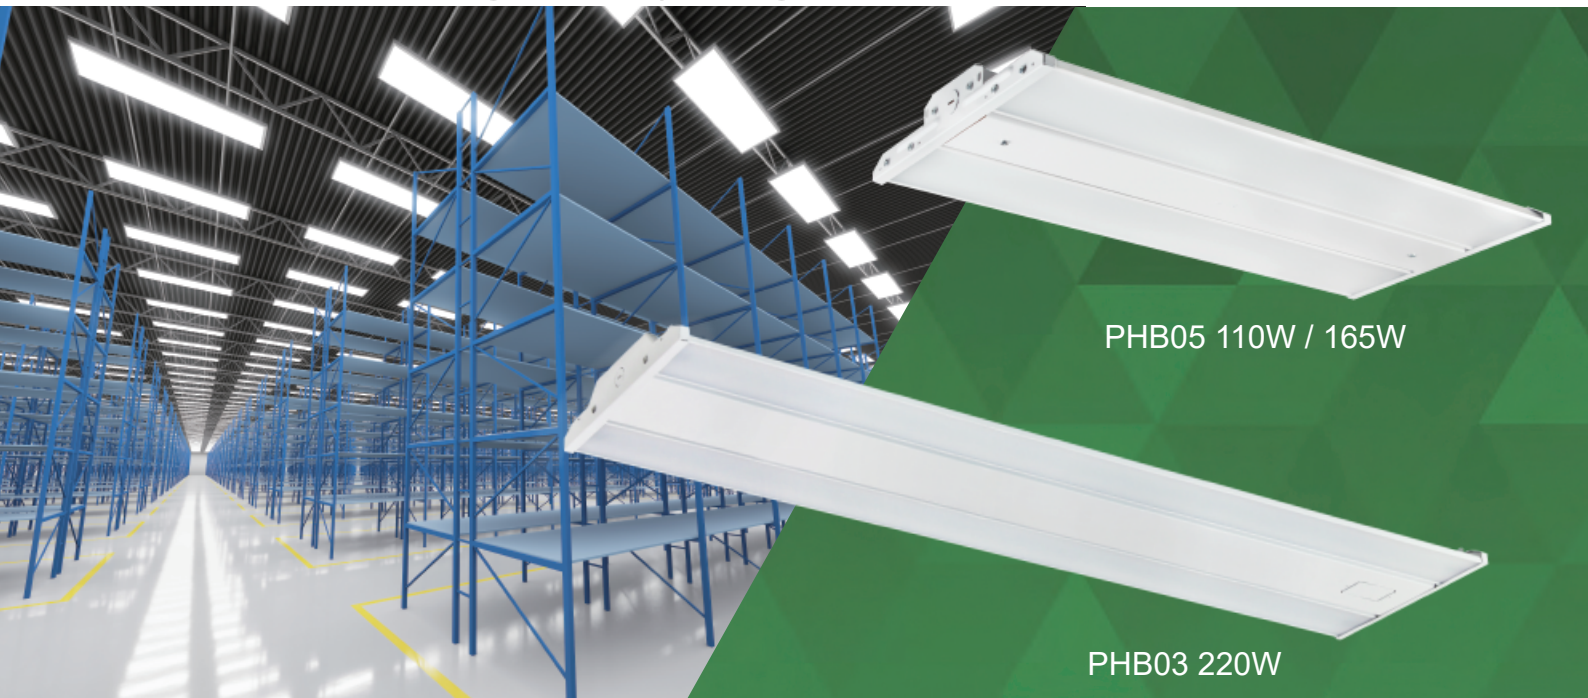

## Key Features

### OPTICS:

- PHB03&PHB05 series Light engines are available in standard 4000K, 5000K and 5700K configurations.
- Frosted cover provide soft lighting

### ELECTRICAL:

- Input voltage:120-277V
- 1-10V dimming
- THD: ≤20%, Power Factor: ≥0.9.

### CONTROLS:

- Optional for motion sensor(220W)

### INSTALLATION:

- With Cable that easy to install

### LIFESPAN:

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

### LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified and DLC qualified.
- UL listed for lamp locations.
- Rated for ambient operating temperature -40°F to 122°F (-40°C to 50°C ).

## Optional Accessories




Use for 220W Linear Highbay Light


Model No	Power (W)	Voltage	CRI	5000K		Dimension	Weight (lbs)
				Lumens	Efficacy		
ML-PHB05-110WBFP3C1-WH50	110W	120-277V	>80	15510lm	141lm/w	24.8×11.8×1.9"	9
ML-PHB05-165WBFP3C1-WH50	165W	120-277V	>80	22605lm	137lm/w	24.8×11.8×1.9"	9.57
ML-PHB03-220WRAFP1C1-WH50	220W	120-277V	>80	27060lm	123lm/w	47.2×11.8×2.4"	17.16

## Dimensions


110W/165W

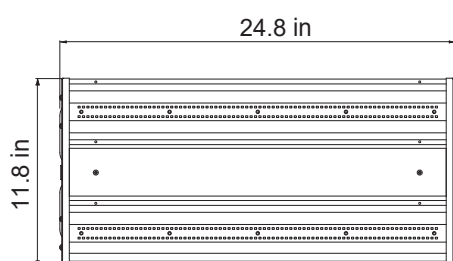

220W

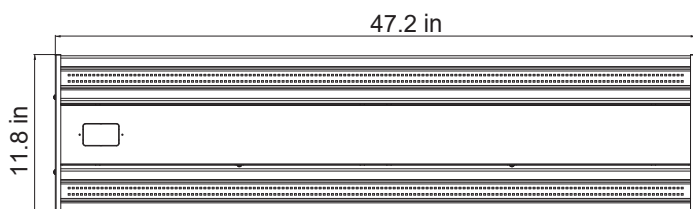

## Installation Diagram

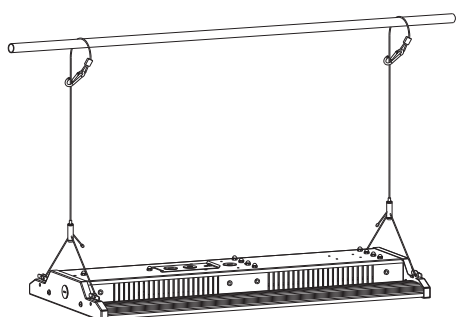

## Distribution Diagram

