


SINGLE PIN LED T8 TUBE LIGHT



Maximum overall	A	B	C
8FT	2388mm	2371mm	Ø28mm




FEATURES

Input voltage:	AC90-277V
Operating frequency:	50/60Hz
Power factor:	≥ 0.90
Ambient temperature range:	-20°C ~+40°C
Color Temp:	5000K~6500K
THD:	<20%
IP Rating:	IP20
CRI:	>80Ra
Beam angle:	120°
Base:	FA8
Cover:	Clear & Frosted

- Luminous Flux:>120lm/w
- Housing material:6063-T5
- Suitable to use in UL approved enclosed fixtures
- Available for Single Ended Power or Double Ended Power
- 5 years warranty

PARAMETER

Length (ft)	Product code	Certification	CRI	Wattage	Lumens 5000K-6500K	Lens	Weight/carton
8ft	ML-T8-8-45WT-F-5K	EITL/cEITLus	>80	45W	5400 lm	Frosted	17.5kg
8ft	ML-T8-8-45W-C-65K	EITL/cEITLus	>80	45W	5400 lm	Clear	17.5kg

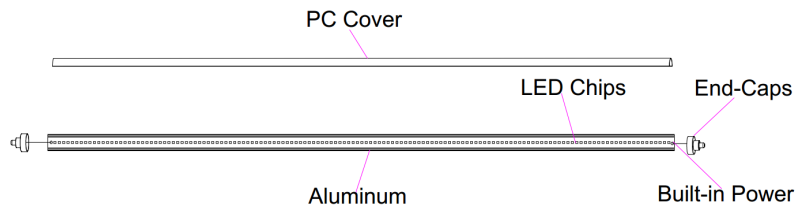

Electric Shock Attention

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.

WARNING

Ensure to cut off the power supply before installing, in case of high voltage electric shock.

Tube Using Precautions:

1. Protection Level is IP20; it should avoid in the heat source, water vapor, corrosive environment.
2. Please use with tubes of compatible electronic ballast, specific models please consult supplier or professionals.
3. If pins are damaged, first it should be cut off the AC, replaced by the related professionals, in order to avoid danger such as short circuit or electric spark phenomenon;
4. Please tear off the lamp surface protective film before installation;
It must refer to installation instructions, And must make sure that contact is well with holder;
5. No matter under what circumstances, tubes surface can't cover insulating materials or similar materials;
6. Amateurs are not allowed to open and outfit LED tubes, and please avoid hands touch with surface when the tube light on.