

# LED Traditional Non-Cut off Wallpack Light



## Key Features

### OPTICS:

- SWP01 series Light engines are available in standard 3000K, 4000K, 5000K and 5700K configurations. SWP01B 80W are CCT Selectable, 4000K/4500K/5000K all in one.
- Impact and UV-resistant polycarbonate lens is precisely designed to give aspecific light distribution, maximizing efficiency and application spacing.

### ELECTRICAL:

- Universal 120-277V input voltage.
- THD:  $\leq 20\%$ , Power Factor:  $\geq 0.9$ .

### CONTROLS:

- Optional button photocell for additional energy savings

### INSTALLATION:

- Wall mount or junction box mount options are available.
- Easy installation with integrated level bubble and hinged door.

### LIFESPAN:

- Estimated 50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

### LISTINGS:


- DesignLights Consortium® (DLC) Premium qualified and DLC qualified.
- UL listed for wet locations.
- Rated for ambient operating temperature  $-4^{\circ}\text{F}$  to  $113^{\circ}\text{F}$  ( $-20^{\circ}\text{C}$  to  $45^{\circ}\text{C}$ ).

# Specifications


Power (W)	Voltage	CRI	5000K		Dimension	Weight (lbs)
			Lumens	Efficacy		
40W	100-277V	>80	5540lm	136lm/w	14.21x9.25x9.92"	9.68
80W	100-277V	>80	10560lm	132lm/w	14.21x9.25x9.92"	10.56
120W	100-277V	>80	15600lm	130lm/w	14.21x9.25x9.92"	12.32
80W CCT	100-277V	>80	10560lm	132lm/w	14.21x9.25x9.92"	10.56

# Dimensions & Weight

40W/80W/120W/80W CCT

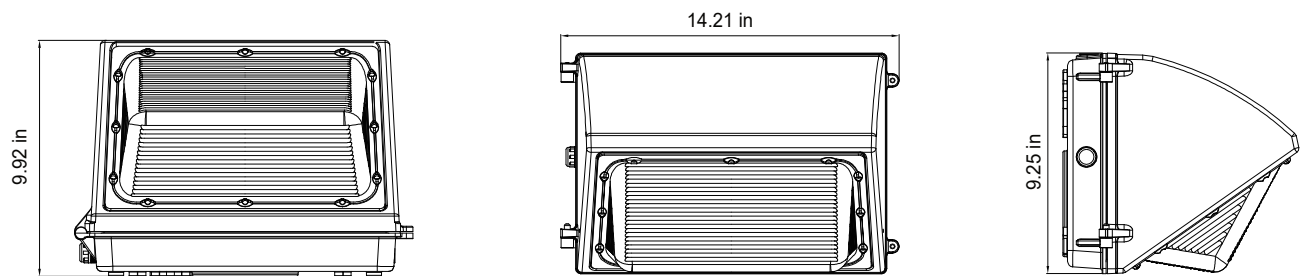

# Installation Diagram

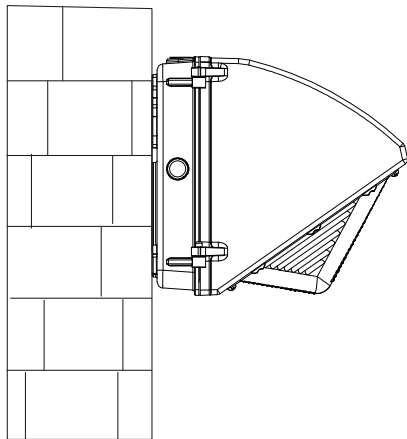

# Distribution Diagram

