

LED T8 Tube Light


ML-T8

- 2ft: **ML-T8-2-10W**
- 4ft: **ML-T8-18WN4T**
- 4ft: **ML-T8-22WN4T**



FEATURES

- UL/DLC
- Suitable for Damp Location (IP20 rated!)
- 100-277Vac 50/60Hz (Input V)
- Efficacy: 120lm/w
- THD: <20%
- Beam angle: 120°
- Base: G13
- Cover: Clear, Frosted, Striped
- Available for Single Ended Power or Double Ended Power

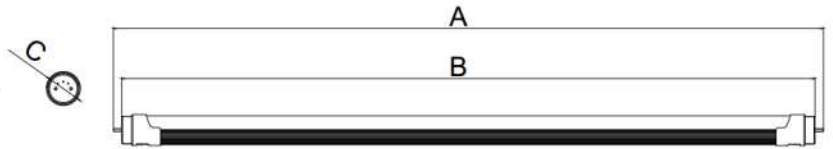



	Maximum Overall	A	B	C
2ft		23.74in	23.15in	1.1in
4ft		47.76in	47.17in	1.1in

Length (ft)	Product Code	WATTAGE	LUMEN	LUMEN EFFICACY	BEAM ANGLE	CRI	CCT
2ft	ML-T8-2-10W	10W	1200Lm	120 Lm/W	120°	>80	3000K~5000K
4ft	ML-T8-18WN4	18W	2160Lm	120 Lm/W	120°	>80	3000K~5000K
4ft	ML-T8-22WN4	22W	2640Lm	120 Lm/W	120°	>80	3000K~5000K

4224 Northeast Expressway Atlanta, GA 30340

888.533.7860 • www.metroled.com • info@metroled.com

MOUNTING GUIDE

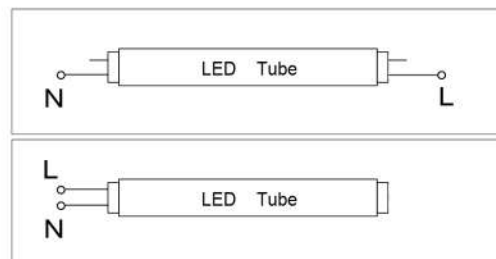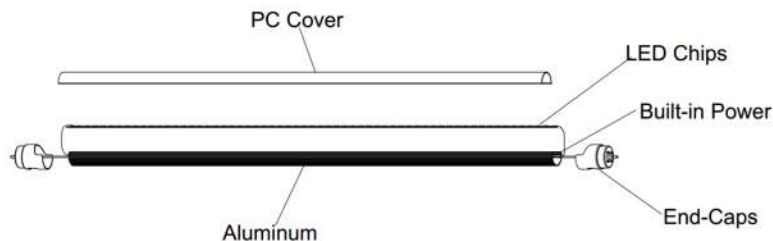


INSTALLATION INSTRUCTION

LED Tube Light Install Instructions

● Installation:

1. Please read the instructions before installation.
2. Please cut off the power supply before installation.
3. Choose the lamp holder according to the specification of lamp, please make sure the working voltage is the same as the working voltage signed on the LED tube light.
4. Please supply the power according the schematic of LED tube light(as follow ,choose anyone).
5. Please supply the power after make sure the working voltage is normal ,lamp holder install well.

● Supply power schematic of LED tube light



● Attention:


1. Please connect the power supply according the supply power schematic of LED tube light.
2. Indoor use only, non-waterproof.
3. Please do not open the tube light in order to ensure the lifetime of tube light and safety.
4. Please supply the power after check the holder install well, connect circuit is normal and working voltage is the same as the signed working voltage on LED tube light.
5. Please do not touch the tube light after supply the power.
6. Please remove the ballast(include electronic and inductive)and starter when replace the traditional tube light, make sure the advantage of tube light,like stability, environmental and energy saving, supply the power as the supply power schematic of LED tube light.

LED Tube Light Install Instructions

● Installation:

1. Please read the instructions before installation.
2. Please cut off the power supply before installation.
3. Choose the lamp holder according to the specification of lamp, please make sure the working voltage is the same as the working voltage signed on the LED tube light.
4. Please supply the power according the schematic of LED tube light(as follow ,choose anyone).
5. Please supply the power after make sure the working voltage is normal ,lamp holder install well.

● Supply power schematic of LED tube light



● Attention:

1. Please connect the power supply according the supply power schematic of LED tube light.
2. Indoor use only, non-waterproof.
3. Please do not open the tube light in order to ensure the lifetime of tube light and safety.
4. Please supply the power after check the holder install well, connect circuit is normal and working voltage is the same as the signed working voltage on LED tube light.
5. Please do not touch the tube light after supply the power.
6. Please remove the ballast(include electronic and inductive)and starter when replace the traditional tube light, make sure the advantage of tube light,like stability, environmental and energy saving, supply the power as the supply power schematic of LED tube light.

WARNING:

1. DISCONNECT POWER BEFORE INSTALLATION, MUST OPERATED BY ELECTRICIAN
2. TAKE OUT THE TUBE. BEFORE INSTALLATION PLEASE CHECK IF THERE IS ANY UNSATISFACTORY CONDITION OF THE TUBE, SUCH AS WHETHER THE APPEARANCE IS DAMAGED OR DEFORMED, OR THE ACCESSORIES ARE COMPLETE OR NOT.
3. PLEASE USE IT UNDER CORRECT INPUT POWER RANGE
4. THIS TUBE IS NON-DIMMABLE
5. NOT FOR OUTDOOR OR SOME WHERE BE EXPOSED TO RAIN(WATERPROOF TYPE AVAILABLE)
6. IF THE LIGHTS DON'T WORK PROPERLY, PLEASE CHECK THE CONNECTIONS AFTER TURNING OFF THE POWER
7. USE UL APPROVED 3-PIN PLUG.

4224 Northeast Expressway
Atlanta, Ga 30340
888.533.7860
info@metroled.com
www.metroled.com

